
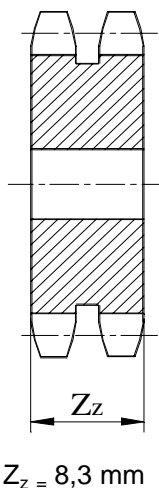


LÁNCKERÉK
szelet
görgős lánchoz
DIN 8187,
ISO 606 szerint

Anyaga: C45

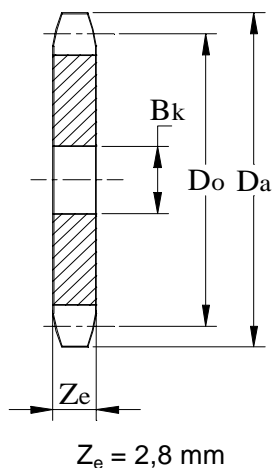

Méret 8 x 3 mm			05B-1	05B-2					05B-1	05B-2	
z	Da	D ₀	B _k	B _k		z	Da	D ₀	B _k	B _k	
8	24,0	20,90	6	6		45	118,0	114,68	12	14	
9	26,6	23,39	6	6		46	120,6	117,23	12	14	
10	29,2	25,89	8	8		47	123,1	119,77	12	14	
11	31,7	28,39	8	8		48	125,6	122,32	12	14	
12	34,2	30,91	8	8		49	128,2	124,86	12	14	
13	36,7	33,42	8	8		50	130,7	127,41	12	14	
14	39,2	35,95	8	8		51	133,3	129,95	14	16	
15	41,7	38,48	8	8		52	135,08	132,5	14	16	
16	44,3	41,01	8	10		53	138,4	135,04	14	16	
17	46,8	43,53	8	10		54	140,9	137,59	14	16	
18	49,3	46,07	8	10		55	143,5	140,13	14	16	
19	51,9	48,61	8	10		56	146,0	142,68	14	16	
20	54,4	51,14	8	10		57	148,6	145,22	14	16	
21	57,0	53,68	8	10		58	151,0	147,77	14	16	
22	59,5	56,21	8	10		59	153,6	150,31	14	16	
23	62,0	58,75	8	10		60	156,2	152,86	14	16	
24	64,6	61,29	8	10		62	162,0	157,95	16	20	
25	67,5	63,83	8	10		64	167,1	163,04	16	20	
26	69,5	66,37	10	12		65	169,6	165,59	16	20	
27	72,2	68,91	10	12		66	172,2	168,13	16	20	
28	74,8	71,45	10	12		68	177,3	173,22	16	20	
29	77,3	73,99	10	12		70	182,4	178,31	16	20	
30	79,8	76,53	10	12		72	187,5	183,4	20	20	
31	82,4	79,08	10	12		75	195,1	191,04	20	20	
32	84,9	81,61	10	12		76	197,7	193,59	20	20	
33	87,5	84,16	10	12		78	202,8	198,68	20	20	
34	90,0	86,70	10	12		80	207,9	203,77	20	20	
35	92,5	89,25	10	12		85	220,6	216,5	20	20	
36	95,0	91,79	10	12		90	233,4	229,23	20	20	
37	97,6	94,33	10	12		95	246,1	241,96	20	20	
38	100,2	96,88	10	12		100	258,9	254,69	20	20	
39	102,7	99,42	10	12		110	284,3	280,15	20	20	
40	105,3	101,97	10	12		114	294,5	290,34	20	20	
41	107,8	104,51	12	14		120	310,0	305,61	20	20	
42	110,4	107,05	12	14		125	322,5	318,34	20	20	
43	112,9	109,60	12	14							
44	115,5	112,14	12	14							