
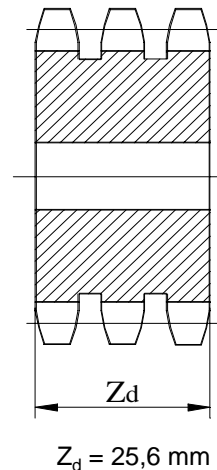
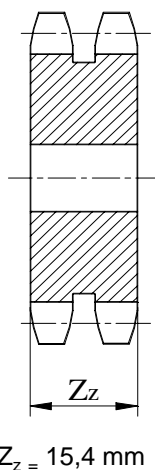


LÁNCKERÉK
szelet
görgős lánchoz
DIN 8187,
ISO 606 szerint

Anyaga: C45

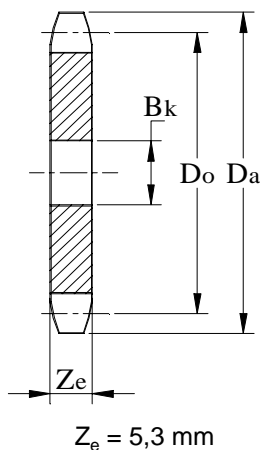

Méret 3/8" x 7/32"			06B-1	06B-2	06B-3				06B-1	06B-2	06B-3
z	Da	D0	Bk	Bk	Bk	z	Da	D0	Bk	Bk	Bk
8	28,0	24,89	6	6	6	45	140,7	136,55	16	16	16
9	31,0	27,85	7	8	8	46	143,7	139,58	16	16	16
10	34,0	30,82	7	8	10	47	146,7	142,61	16	16	16
11	37,0	33,80	8	10	10	48	149,7	145,64	16	16	16
12	40,0	36,80	8	10	10	49	152,7	148,67	16	16	16
13	43,0	39,79	8	10	10	50	155,7	151,69	16	16	16
14	46,3	42,80	8	10	12	51	158,7	154,72	16	16	20
15	49,3	45,81	8	10	12	52	161,8	157,75	16	16	20
16	52,3	48,82	10	12	12	53	164,8	160,78	16	16	20
17	55,3	51,83	10	12	12	54	167,8	163,82	16	16	20
18	58,3	54,85	10	12	12	55	170,8	166,85	16	16	20
19	61,3	57,87	10	12	12	56	173,8	169,88	16	16	20
20	64,3	60,89	10	12	12	57	176,9	172,91	16	16	20
21	68,0	63,91	10	12	14	58	179,9	175,94	16	16	20
22	71,0	66,93	10	12	14	59	183,0	178,97	16	16	20
23	73,5	69,95	10	12	14	60	186	182,00	16	16	20
24	77,0	72,97	10	12	14	62	192,1	188,06	20	20	20
25	80,0	76,00	10	12	14	64	198,2	194,12	20	20	20
26	83,0	79,02	10	12	14	65	201,6	197,15	20	20	20
27	86,0	82,05	10	12	14	66	204,6	200,18	20	20	25
28	89,0	85,07	10	12	14	68	210,7	206,24	20	20	25
29	92,0	88,09	10	12	14	70	216,7	212,3	20	20	25
30	94,7	91,12	10	12	14	72	222,8	218,37	20	20	25
31	98,3	94,15	12	14	16	75	231,9	227,46	20	20	25
32	101,3	97,17	12	14	16	76	234,9	230,49	20	20	25
33	104,3	100,20	12	14	16	78	241	236,55	20	20	25
34	107,3	103,23	12	14	16	80	247,1	242,61	20	20	25
35	110,4	106,26	12	14	16	85	262,2	257,77	20	20	25
36	113,4	109,29	12	14	16	90	277,4	272,93	20	20	25
37	116,4	112,32	12	14	16	95	292,5	288,08	20	20	25
38	119,5	115,35	12	14	16	100	307,7	303,24	20	20	25
39	122,5	118,37	12	14	16	110	338	333,55	20	20	25
40	125,5	121,40	12	14	16	114	349,5	345,68	20	20	25
41	128,5	124,43	16	16	16	120	368,3	363,87	20	20	25
42	131,6	127,46	16	16	16	125	383,5	379,03	20	20	25
43	134,6	130,49	16	16	16						
44	137,6	133,52	16	16	16						