

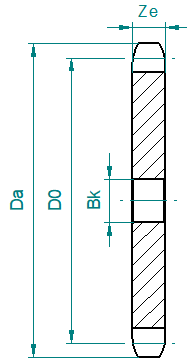


LÁNCKERÉK
szelet
görgős lánchoz
DIN 8187,
ISO 606 szerint

Anyaga: C45

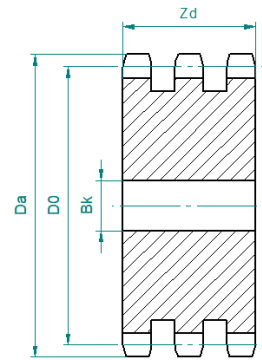

$Z_e = 4,5 \text{ mm}$

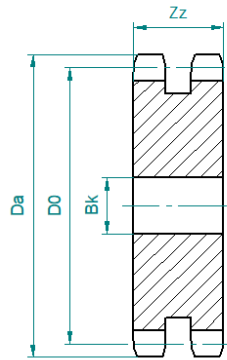

Méret 1/2" x 3/16"			083-1						083-1		
z	Da	D ₀	B _k			z	Da	D ₀	B _k		
8	37,2	33,18	8			45	187,5	182,06	16		
9	41,5	37,13	8			46	191,6	186,1	20		
10	46,2	41,10	8			47	195,6	190,14	20		
11	49,6	45,07	8			48	199,7	194,18	20		
12	53,9	49,07	8			49	203,7	198,22	20		
13	58,4	53,06	8			50	207,8	202,26	20		
14	62,8	57,07	8			51	211,8	206,3	20		
15	66,8	61,09	8			52	215,9	210,34	20		
16	70,9	65,10	10			53	219,9	214,38	20		
17	74,9	69,11	10			54	224,0	218,42	20		
18	78,9	73,14	10			55	228,0	222,46	20		
19	82,9	77,16	10			56	232,1	226,5	20		
20	86,9	81,19	10			57	236,1	230,54	20		
21	91,0	85,22	10			58	240,2	234,58	20		
22	95,0	89,24	10			59	244,2	238,62	20		
23	99,0	93,27	10			60	248,2	242,66	20		
24	103,0	97,29	10			62	256,7	250,74	20		
25	107,1	101,33	10			64	264,8	258,83	20		
26	111,2	105,36	12			65	268,8	262,87	20		
27	115,4	109,40	12			66	272,9	266,91	25		
28	119,4	113,42	12			68	280,9	274,99	25		
29	123,4	117,46	12			70	289,0	283,07	25		
30	127,5	121,50	12			72	297,1	291,15	25		
31	131,5	125,54	12			76	313,3	307,32	25		
32	135,5	129,56	12			78	321,4	315,4	25		
33	139,6	133,60	12			80	329,4	323,49	25		
34	143,6	137,64	12			85	349,7	343,69	25		
35	147,6	141,68	12			90	369,9	363,9	25		
36	151,7	145,72	16			100	410,3	404,32	25		
37	155,7	149,76	16			110	450,7	444,74	25		
38	159,8	153,80	16			114	466,9	460,91	25		
39	163,8	157,83	16			120	491,2	485,16	25		
40	167,8	161,87	16			125	511,4	505,37	25		
41	171,4	165,91	16								
42	175,4	169,95	16								
43	179,5	173,99	16								
44	183,5	178,03	16								