



LÁNCKERÉK
előfűrt aggyal
görgős lánchoz
DIN 8187,
ISO 606 szerint


Anyaga: C45

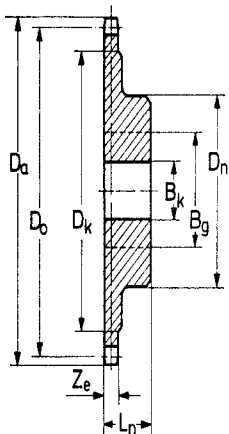

$Z_e = 9,1 \text{ mm}$

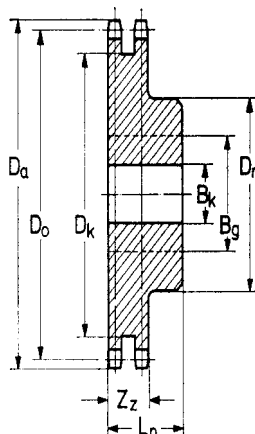

$Z_z = 25,5 \text{ mm}$

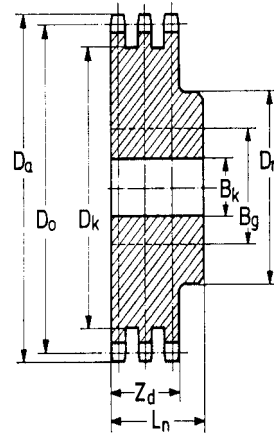

$Z_d = 42,1 \text{ mm}$

Méret 5/8" x 3/8"			10B-1			10B-2			10B-3		
z	Da	D ₀	D _n	B _k	L _n	D _n	B _k	L _n	D _n	B _k	L _n
8	47,0	41,48	25	10	25	25	12	40	25	12	55
9	52,6	46,42	30	10	25	30	12	40	30	12	55
10	57,5	51,37	35	10	25	35	12	40	35	16	55
11	63,0	56,34	37	12	30	39	14	40	39	16	55
12	68,0	61,34	42	12	30	44	14	40	44	16	55
13	73,0	66,32	47	12	30	49	14	40	49	16	55
14	78,0	71,34	52	12	30	54	14	40	54	16	55
15	83,0	76,36	57	12	30	59	14	40	59	16	55
16	88,0	81,37	60	12	30	64	16	45	64	16	60
17	93,0	86,39	60	12	30	69	16	45	69	16	60
18	98,3	91,42	70	14	30	74	16	45	74	16	60
19	103,3	96,45	70	14	30	79	16	45	79	16	60
20	108,4	101,49	75	14	30	84	16	45	84	16	60
21	113,4	106,52	75	16	30	85	16	45	85	20	60
22	118,0	111,55	80	16	30	90	16	45	90	20	60
23	123,4	116,58	80	16	30	95	16	45	95	20	60
24	128,3	121,62	80	16	30	100	16	45	100	20	60
25	134,0	126,66	80	16	30	105	16	45	105	20	60
26	139,0	131,70	85	20	35	110	20	45	110	20	60
27	144,0	136,75	85	20	35	110	20	45	110	20	60
28	148,7	141,78	90	20	35	115	20	45	115	20	60
29	153,8	146,83	90	20	35	115	20	45	115	20	60
30	158,8	151,87	90	20	35	120	20	45	120	20	60
31	163,9	156,92	95	20	35	*120	20	45	*120	20	60
32	168,9	161,95	95	20	35	*120	20	45	*120	20	60
33	174,5	167,00	95	20	35	*120	20	45	*120	20	60
34	179,0	172,05	95	20	35	*120	20	45	*120	20	60
35	184,1	177,10	95	20	35	*120	20	45	*120	20	60
36	189,1	182,15	100	20	35	*120	20	45	*120	25	60
37	194,2	187,20	100	20	35	*120	20	45	*120	25	60
38	199,2	192,24	100	20	35	*120	20	45	*120	25	60
39	204,2	197,29	100	20	35	*120	20	45	*120	25	60
40	209,3	202,34	100	20	35	*120	20	45	*120	25	60
*Az agy hegesztve											