



LÁNCKERÉK
szelet
görgős lánc
DIN 8187,
ISO 606 szerint


Anyaga: C45

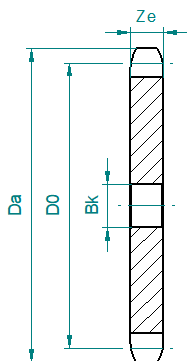

$Z_e = 24,1 \text{ mm}$

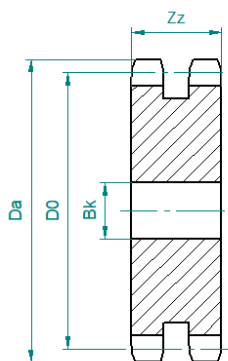

$Z_z = 72,0 \text{ mm}$

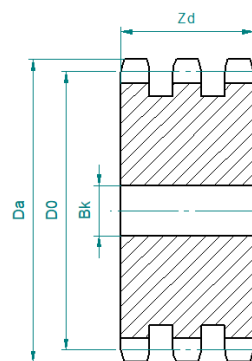

$Z_d = 120,3 \text{ mm}$

Méret 1 1/2" x 1"			24B-1	24B-2	24B-3				24B-1	24B-2	24B-3
z	D _a	D ₀	B _k	B _k	B _k	z	D _a	D ₀	B _k	B _k	B _k
8	115,0	99,56	20	25	25	45	561,2	546,19	30	40	40
9	126,4	111,40	20	25	25	46	573,3	558,30	30	40	40
10	138,0	123,29	20	25	25	47	585,4	570,42	30		
11	150,0	135,23	20	25	25	48	597,4	582,54	30	40	40
12	162,0	147,21	20	25	25	49	609,5	594,66	30		
13	174,2	159,20	20	25	25	50	621,7	606,78	30	40	40
14	186,2	171,22	20	25	25	51	633,8	618,90	30		
15	198,2	183,25	20	25	25	52	646,0	631,02	30		
16	210,3	195,29	25	25	25	53	658,0	643,14	30		
17	222,3	207,35	25	25	25	54	670,2	655,26	30		
18	234,3	219,41	25	25	25	55	682,3	667,38	30	40	40
19	246,5	231,48	25	25	25	56	694,4	679,50	30		
20	258,6	243,55	25	25	25	57	706,5	691,62	30	40	40
21	270,6	255,63	25	25	30	58	718,6	703,75	30		
22	282,7	267,72	25	25	30	59	730,7	715,87	30		
23	294,8	279,80	25	25	30	60	742,8	727,99	30	40	40
24	306,8	291,90	25	25	30	62	767,2	752,23	40		
25	319,0	303,99	25	25	30	64	791,3	776,48	40		
26	331,0	316,09	30	30	30	65	803,4	788,60	40	40	40
27	343,2	328,19	30	30	30	66	815,6	800,72	40		
28	355,2	340,29	30	30	30	68	839,8	824,97	40		
29	367,3	352,39	30	30	30	70	864,2	849,22	40		
30	379,5	364,49	30	30	40	72	888,4	873,46	40		
31	391,6	376,60	30	30		75	924,8	909,84	40		
32	403,7	388,71	30	30	40	76	936,9	921,96	40	40	40
33	415,8	400,82	30	30	40	80	985,4	970,46	40		
34	427,8	412,93	30	30	40	85	1046,0	1031,1	40		
35	440,0	425,04	30	30	40	95	1167,3	1152,3	40		
36	452,0	437,15	30	30	40						
37	464,2	449,26	30	30							
38	476,2	461,37	30	30	40						
39	488,5	473,49	30	30							
40	500,6	485,60	30	30	40						
41	512,6	497,72	30								
42	524,7	509,83	30	40	40						
43	536,8	521,95	30								
44	549,0	534,07	30								